

QUANTUM[®] 1107

QUANTUM[®] 1107



Quantum[®] 1107
Shown in Red with
Synergy[®] seat, swing-away
legrests and VSI controller

More Advanced Features, Excellent Performance & Super Portability. The Quantum[®] 1107 brings the most advanced achievements of our engineering efforts together in one compact yet superbly balanced package that conveniently disassembles for transport. Direct connect components eliminate wiring harnesses and provide clean style, unquestionable convenience, and quick and easy disassembly.



Quantum[®] 1107
Shown in Red with
TRU-Comfort[™] seating,
footboard and VSI controller



Pride
Mobility Products Ltd.
www.pridemobility.com

32 Wedgwood Road
Bicester, Oxfordshire, OX26 4UL
Tel: 01869 324 600
Fax: 01869 323 070

UK_Q1107-SS-2-21-07



Specifications:

WEIGHT CAPACITY:	136kg (21 STONE)
MAXIMUM SPEED:	Up to 6 km/h (4 mph)
GROUND CLEARANCE:	6cm (2.5")
TURNING RADIUS:	52cm (20.5") <i>Without Foot Riggings</i>
LENGTH:	93cm (36.5") <i>Without Foot Riggings</i>
WIDTH:	58cm (23")
DRIVE WHEELS:	25.5cm (10") pneumatic
CASTORS:	15cm (6") solid
ANTI-TIPS:	13cm (5") solid
SUSPENSION:	Advanced Active-Trac® with independent rear castors
DRIVE TRAIN:	2-motor, mid-wheel drive
BRAKING SYSTEM:	Intelligent braking (electronic, regenerative disc brakes)
ELECTRONICS:	VSI controller
STANDARD FOOTREST:	Footboard
BATTERY CHARGER	Off-board, 4 amp (standard)
PER-CHARGE RANGE:**	Up to 19km (12 miles)
BATTERIES:	Two 12 volt 30 amp
BATTERY WEIGHT:	11kg (24.5 lbs.) each
BASE WEIGHT:	51kg (112 lbs.)
MAX. SEATING	See prescription form
DIMENSIONS:	for seat sizing
WARRANTY:	Lifetime warranty on frame 1-year limited warranty on electronics 2-year limited warranty on drive train 18-month PG Drive control systems



- Locking integration of four components provides rigid frame stability



- Direct connectors eliminate wiring harnesses



- Quickly and easily disassembles for travel

Features:

- Advanced Active-Trac® and rear castor suspension for a smoother ride over challenging terrain
- Quickly and easily disassembles for transportation
- Aluminum frame rails and centre locking mechanism provide a very rigid platform for ultimate stability
- Innovative battery boxes and front module eliminate battery and motor harnesses
- VSI controller
- Drop-in armrests

Options:

- Synergy® seat
- Synergy® Manual Recline
- TRU-Balance® Power Positioning Systems
- TRU-Comfort™ seating
- Solid tyres
- Cup holder
- Pilot Plus controller
- TRU-Comfort™ seating system
- Swing-away joystick
- Swing-away footrests
- Elevating leg rests
- Oxygen tank holder
- Cane/crutch holder
- Rear basket
- 80° heavy-duty, drop-in footrests


- Active-Trac® & rear castor suspension



- Elevating leg rests



Colours:

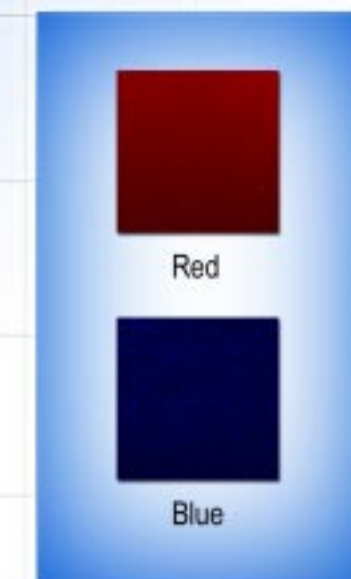

- Cane/crutch holder



The information contained herein is correct at the time of publication; due to the manufacturer's commitment to constant improvement and development, they reserve the right to alter specifications without prior notice.

**Theoretical range is calculated under test conditions in accordance with European standards. Actual range in normal use will depend on many factors, including the condition of the vehicle and its batteries, the weight of the driver, correct tyre pressures, ambient temperature, and the gradient and surface of the road or pavement.

***Exact product configurations shown on this literature may not be available in all markets

